

VacuGuard™ Portable Vacuum Controller

Part Number: 2-3001-10X

Operating Specifications	
Operating Range	1*10 ⁻³ Torr to 20 Torr
Display	Digital
Digital Communications	None
Analog Output	None
Programmable Set Points	None
Battery	D cell, 1.5 V DC
Battery Life	Up to 40 hours
Calibration Medium	Dry air or nitrogen
Overpressure	Sensor-dependent
Operating Temperature	0 °C to 50 °C
Storage Temperature	-20 °C to 60 °C
Bakeout Temperature	Sensor-dependent
Response Time	≤1 s
Accuracy	
1 mTorr to 10 mTorr	±1 mTorr
10 mTorr to 100 mTorr	±10% of reading
100 mTorr to 1000 mTorr	±20% of reading
>1000 mTorr	Indication only
Display Readable Distance	1 m (3 ft)

Ordering Information (sensor not included)	
Instrument and Kits	Part Number
VacuGuard™ only	2-3001-102
VacuGuard™, 2A cable, bag	2-3001-103
VacuGuard™, 2A mini cable, carry case	2-3001-104
VacuGuard™, 2A/DV4/DV6 cable	2-3001-105
VacuGuard™, 2A/DV4/DV6 cable, carry case, rechargeable battery, and battery charger	2-3001-106

Cables	Part Number
2A cable, coiled, 10 ft (3 m)	2-9800-081
NASA/mini 2A cable, coiled, 10 ft (3 m)	2-9800-082
DV-4/DV-6 cable, coiled, 10 ft (3 m)	1-2400-036

Accessories	Part Number
110 V AC battery charger	1-5400-024
NiCd rechargeable D cell battery (pack of 2)	1-5400-025
NiCd rechargeable D cell holder	6-5400-026
Carry case	1-6100-001

Click to Buy Online from Televac® Now!

Compatible Sensors	
Description	Part Number
Televac® 2A Nickel-Plated Brass 1/8" NPT	2-2100-10
Televac® 2A Stainless Steel 1/8" NPT	2-2126-001
Televac® 2A NASA Mini	2-2100-31
Televac® 2A VacuMini	2-2100-102
Televac® 2V6 Stainless Steel 1/8" NPT	2-2111-001
Televac® 2V6 Stainless Steel 1/2" Straight	2-2111-011
Competing DV-4/DV-6 Thermocouples	See manufacturer

Other flanges and fittings are available for the standard nickel-plated brass and stainless steel 2A, 2A NASA Mini, and 2A VacuMini sensor, see more information at www.televac.com.



Description

The Televac® VacuGuard™ Thermocouple Portable Vacuum Controller can be used to read any Televac® 2A thermocouple sensor or competing DV-4/DV-6 thermocouple sensors. It has a variety of features including an easy to read digital display and a single use or rechargeable D cell battery that lasts up to 40 hours. The VacuGuard™ has an optional coiled cable and carrying bag to minimize hassle while taking measurements in the field.

Applications

- Cryogenics
- Field service applications

Visit the Televac® website for more information about applications at www.televac.com.

Materials Exposed to Vacuum (sensors)

Nickel Plated Brass 2A Sensors	Stainless Steel 2A Sensors
Gold	Gold
Solder	Glass
Glass	Alloy 52
Alloy 52	304 Stainless Steel
Nickel	Tophet
Tophet	Cupron
Cupron	

Benefits

- Competitively priced
- Very compact design
- Lightweight and portable
- Excellent customer service and support
- Rapid turn-around for calibration and service

Ratings and Compliance

- IP50



Related Products

Description	Part Number
B2A Portable Vacuum Controller	2-3001-10X
MV2A Vacuum Controller	2-7900-07X



B2A Portable



MV2A



Additional Documentation

- [Televac® Tolerances](#)
- [AN 3010 - Torr Scientific/Torr Decimal/mTorr/Micron Conversions](#)
- [AN 3015 - Televac® Recommended Practices for Vacuum Calibration](#)
- [AN 3020 - Vacuum Terminology Reference](#)

Physical Characteristics

Enclosure	Stainless steel
Weight with Sensor (typical)	0.7 kg (1.5 lbs)
Dimensions	See dimensional drawing

Dimensional Drawing

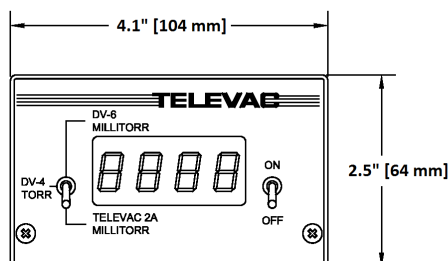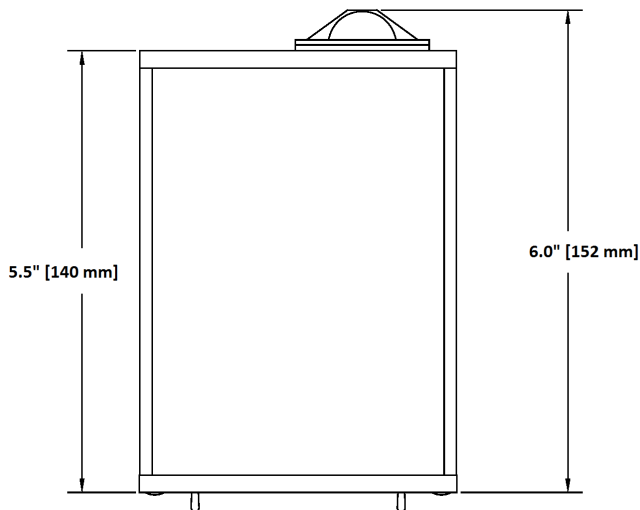

Company Information

Specialty manufacturing services that promise precision - For more than 85 years, Televac® has specialized exclusively in tilt and vacuum measurement products. Today, our precise manufacturing processes produce the most accurate and advanced products on the market, ensuring perfection every time. A true specialty service provider, we are willing and eager to put our experience and capabilities to good use, helping OEMs and end users achieve even the most complex designs.

High performance products designed and manufactured in the USA - Televac® is a global provider and U.S. manufacturer and designer of high performance vacuum measurement products. Built to last, our products are made with state-of-the-art sensing technology, proven processes, and an intrinsic passion for the trade. Offering simple integration and quality and safety benchmarks, our customers benefit not just from standard-setting reliability, but from our commitment to competitive pricing and performance.

A partnership that prioritizes uptime, lead time, and service - Televac® guarantees customer satisfaction and our 'not too big, not too small' operation is what enables us to offer a true partnership experience. Our dedicated representatives and engineers offer exceptionally responsive service and some of the fastest lead times in the industry, knowing that uptime is the key to your success. With anytime-access to our leadership team and solutions that enhance your products, you will feel the Fredericks difference.

Vacuum measurement tools built for the toughest jobs - Televac®'s world-class vacuum sensors, gauges, and control instrumentation are engineered for the most demanding applications and environments. Our Televac® and ETI vacuum brands feature cold-cathode technology, thermocouple and convection gauges, and precision-manufactured hot ionization gauges. Dedicated solely to vacuum gauging and calibration services, we provide industrial heating, national laboratories, cryogenics, and industrial gas applications, among many others, with fast lead times and industry-leading performance. Covering the entire practical vacuum range, our products deliver rapid response vacuum readings and superior sensitivity.

[Read more about us!](#)

Contact Us

Televac® - The Fredericks Company
 2400 Philmont Avenue
 Huntingdon Valley, PA 19006
 tel: +1 215 947 2500
 fax: +1 215 947 7464
 email: sales@frederickscompany.com
 web: www.frederickscompany.com

Disclaimer: Specifications subject to change without notice. The Fredericks Company assumes no responsibility for inaccuracies in product specifications or any liability arising from product use.
 © 2021 - The Fredericks Company